

ELECTROMAGNETISM




BASIC CONCEPTS


1. MAGNETS HAVE TWO POLES :
NORTH AND SOUTH
2. NORTH REPELS NORTH ;
SOUTH REPELS SOUTH
3. NORTH ATTRACTS SOUTH

MAGNETIC FIELD

- MAGNETIC FIELD LINES OUTSIDE A MAGNET FLOW FROM NORTH TO SOUTH
- MAGNETIC FIELD LINES INSIDE A MAGNET FLOW FROM SOUTH TO NORTH
- THE DENSITY OF LINES AT A GIVEN POINT IS PROPORTIONAL TO THE MAGNETIC FIELD STRENGTH AT THAT POINT
- FIELD LINES FORM A VECTOR FIELD THAT SHOWS THE ORIENTATION OF A COMPASS

· MAGNETIC FIELD LINES ALWAYS FORM
CLOSED LOOPS

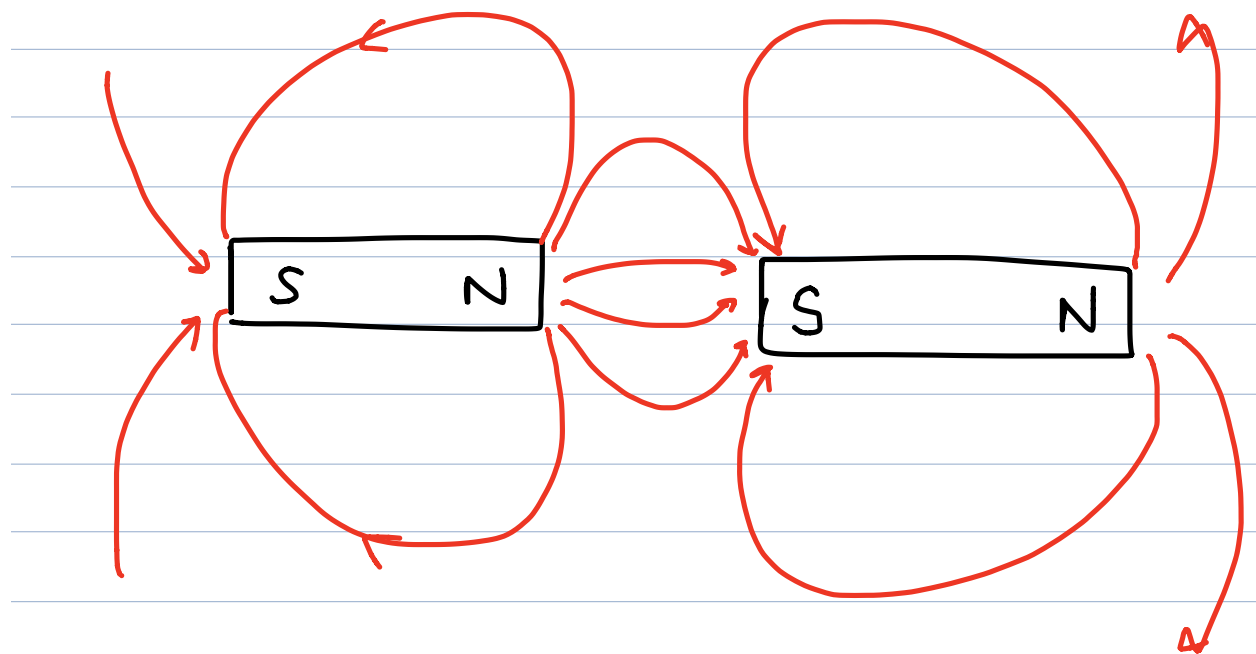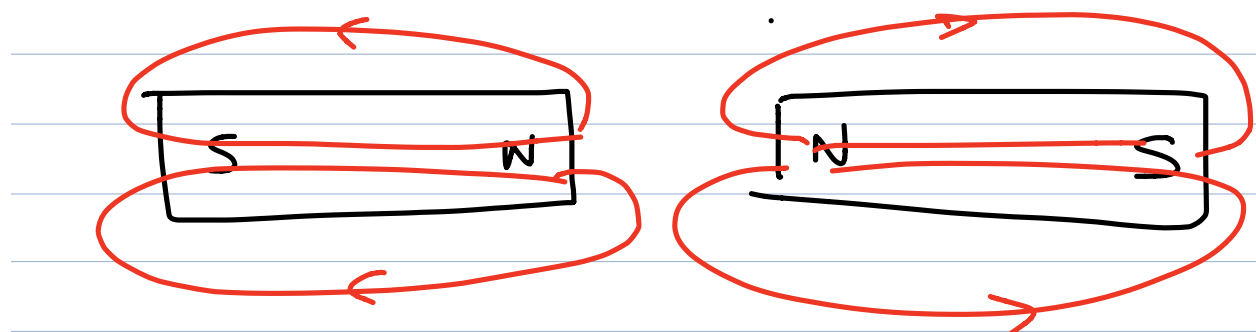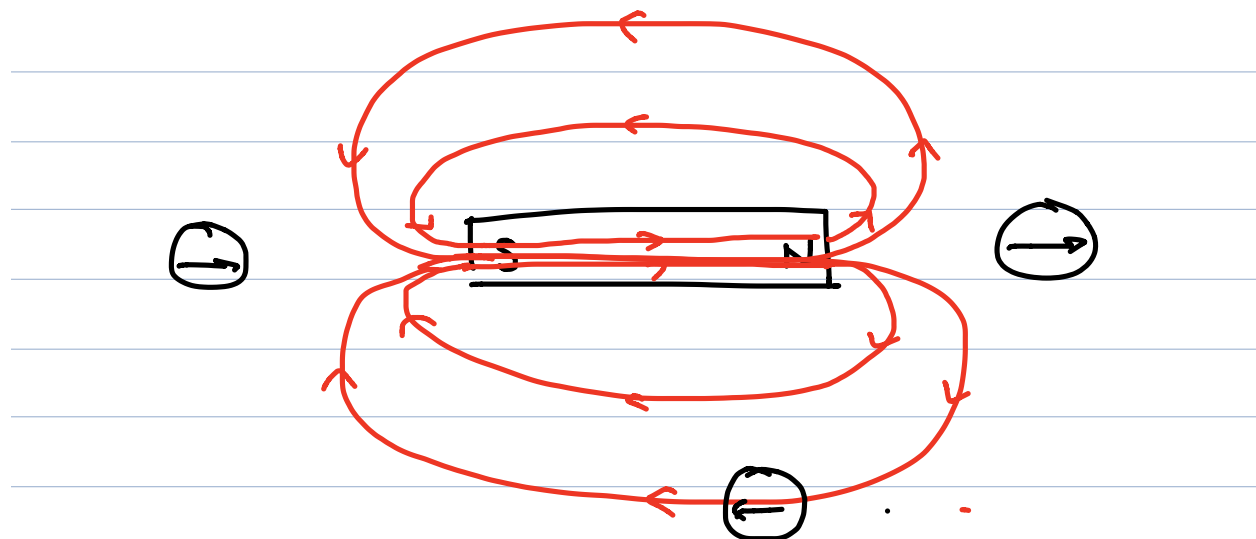


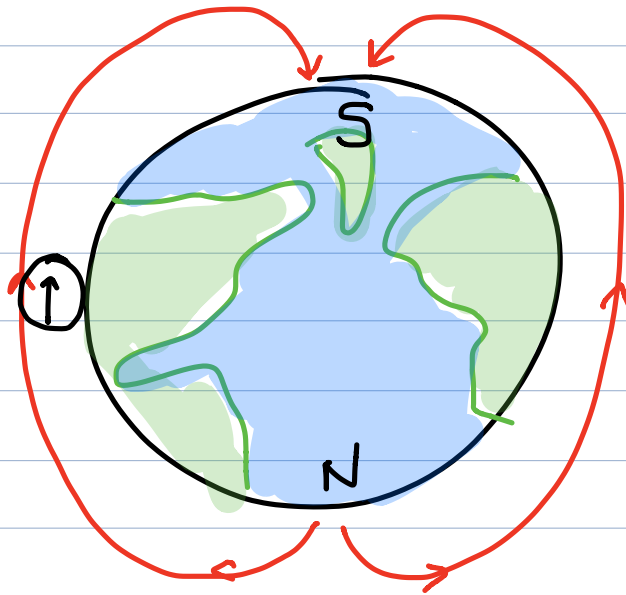

ELECTROMAGNETISM


- A CURRENT-CARRYING WIRE PRODUCES A MAGNETIC FIELD.
- THE DIRECTION OF THE MAGNETIC FIELD IS GIVEN BY THE RIGHT HAND RULE (#1)

→ THUMB POINTS IN DIRECTION OF CURRENT, FINGERS WRAP AROUND IN DIRECTION OF MAGNETIC FIELD






UP
LEFT | RIGHT

OUT OF
THE PAGE
○



↓ DOWN

⊗ INTO THE PAGE

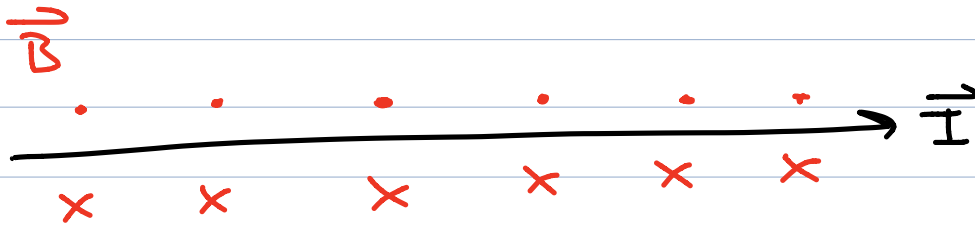

- THE BIOT-SAVART LAW DESCRIBES THE MAGNETIC FIELD STRENGTH NEAR A WIRE.

$$B = \frac{\mu_0 I}{2\pi d}$$

B: MAG. FIELD STRENGTH, T
 μ_0 : PERMEABILITY OF FREE SPACE ($4\pi \times 10^{-7} \text{ T}\cdot\text{m/A}$)

I: CURRENT, A

d: DISTANCE FROM WIRE, m

EXAMPLE


A TOASTER USES 10 A OF CURRENT IF THE CURRENT IS CONSTANT, WHAT IS THE MAGNETIC FIELD STRENGTH AT A DISTANCE

OF 1.0 m?

$$B = \frac{\mu_0 I}{2\pi d} = \frac{(4\pi \times 10^{-7})(10)}{2\pi(1.0)} = 2 \times 10^{-6} \text{ T}$$

SOLENOIDS

- B-FIELDS AROUND SINGLE WIRES ARE RELATIVELY WEAK AT NORMAL CURRENT LEVELS
- **SOLENOIDS** GEOMETRICALLY CONCENTRATE THE FIELD BY WRAPPING THE WIRE INTO A COIL

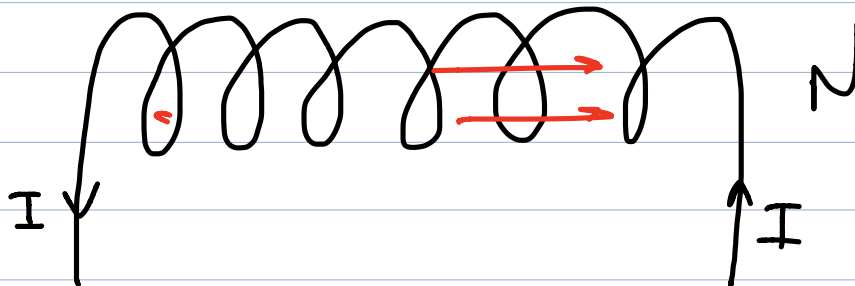

$$B = \mu_0 n I$$

$$= \mu_0 \frac{N}{L} I$$

$$n = \frac{N}{L}$$

TOTAL WINDS
TOTAL LENGTH

B: MAG. FIELD, T

μ_0 : PERMEABILITY OF

FREE SPACE

$(4\pi \times 10^{-7} \text{ T}\cdot\text{m/A})$

n : # OF WINDS PER

METRE (m^{-1})

I: CURRENT

- THE DIRECTION OF THE B-FIELD INSIDE THE SOLENOID IS GIVEN BY THE RIGHT HAND RULE (#2)
 - WRAP FINGERS IN DIRECTION OF CURRENT, THUMB POINTS NORTH


EXAMPLE

A SOLENOID 25 cm IN LENGTH HAS 500 WINDINGS. WHAT IS THE B-FIELD INSIDE THE SOLENOID WHEN IT HAS A CURRENT OF 2.0 A?

$$\begin{aligned} B &= \mu_0 n I & \checkmark \frac{N}{L} = n \\ &= (4\pi \times 10^{-7}) \left(\frac{500}{0.25} \right) (2.0) \\ &= \boxed{0.05 \text{ T}} \end{aligned}$$

MAGNETIC FORCE ON A CHARGE

- A CHARGE IN MOTION PRODUCES A MAGNETIC FIELD WHICH CAN INTERACT WITH AN EXTERNAL MAGNETIC FIELD

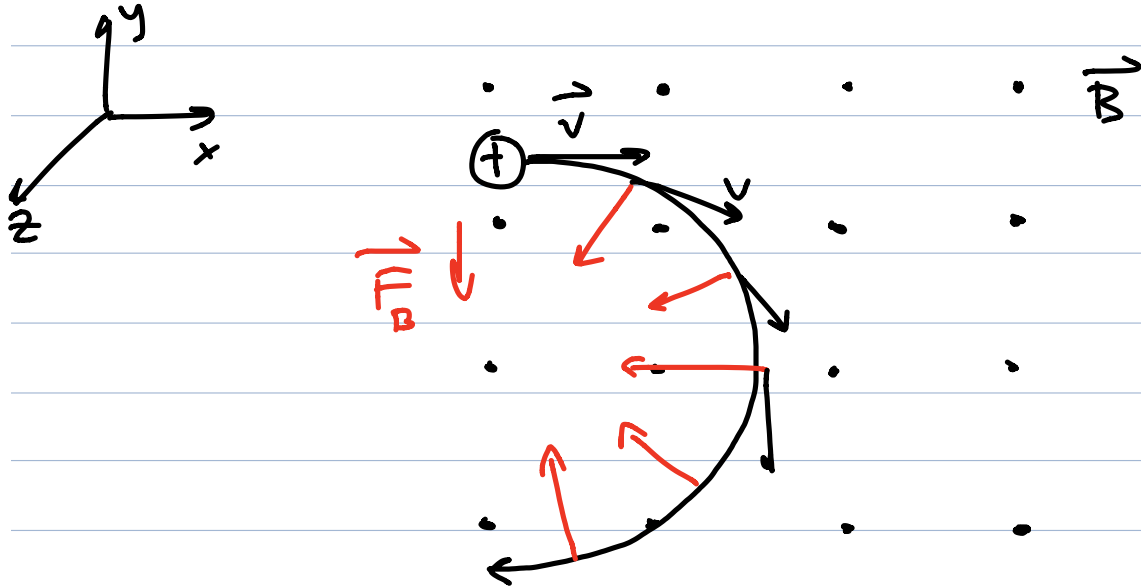

$$\vec{F}_B = q \vec{v} \times \vec{B}$$

VECTOR PRODUCT

\vec{F}_B : MAGNETIC FORCE, N

q : CHARGE, C

\vec{v} : VELOCITY, $\frac{m}{s}$

\vec{B} : MAGNETIC FIELD, T

- V AND B MUST BE PERPENDICULAR
- IF NOT PERPENDICULAR, USE THE PERPENDICULAR COMPONENT

$$F_B = q v B \sin \theta$$

- IF V AND B ARE PARALLEL, THERE IS NO MAGNETIC FORCE


- THE DIRECTION OF THE MAGNETIC FORCE IS GIVEN BY THE RIGHT HAND RULE (#3) (AKA **FBI RULE**)
 - **F**: MAGNETIC FORCE **MIDDLE F.**
 - **B**: MAGNETIC FIELD **INDEX**
 - **I**: CURRENT / VELOCITY OF POSITIVE **THUMB.**
CHARGE
- BECAUSE MAGNETIC FORCE IS \perp TO THE VELOCITY, ALL CHARGED PARTICLES THAT ENTER A MAGNETIC FIELD WILL EXPERIENCE CIRCULAR MOTION.

EXAMPLE

A PROTON BEAM ENTERS A MAGNETIC FIELD AS SHOWN WITH A SPEED OF $6.0 \times 10^6 \frac{\text{m}}{\text{s}}$.

- DETERMINE THE MAGNITUDE OF F_B .
- DESCRIBE THE PATH OF THE PROTON.
- HOW WOULD THE PATH CHANGE IF AN ELECTRON BEAM ENTERED THE B-FIELD INSTEAD (AT THE SAME SPEED)?



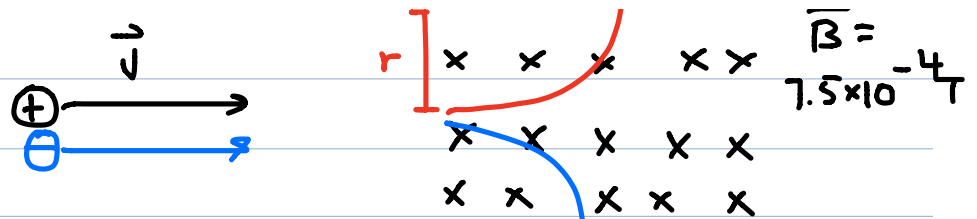

a) $F_B = qvB$

$$= (1.60 \times 10^{-19}) (6.0 \times 10^6) (7.5 \times 10^{-4})$$

$$= \boxed{7.2 \times 10^{-16} \text{ N}}$$

b) $F_B = F_c$

$$qvB = ma_c$$

$$qvB = m \frac{v^2}{R}$$


$$R = \frac{mv}{qB} = \frac{(1.67 \times 10^{-27}) (6.0 \times 10^6)}{(1.60 \times 10^{-19}) (7.5 \times 10^{-4})}$$

$$= \boxed{83.5 \text{ m}}$$

c) SEE DIAGRAM

- radius is smaller
(same Force, less mass)

MAGNETIC FORCE ON A CURRENT-CARRYING WIRE

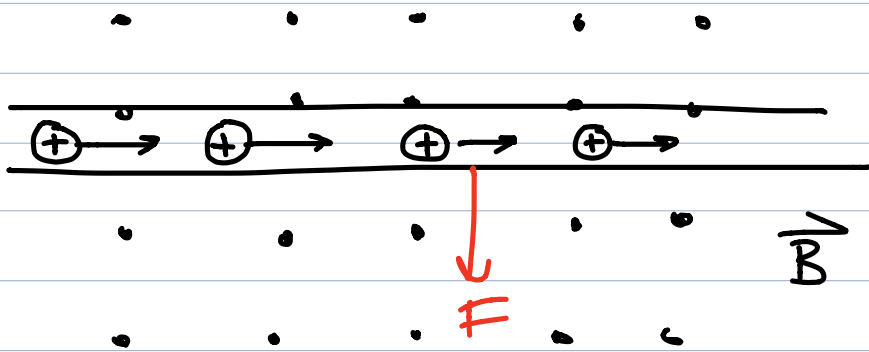

- A CURRENT-CARRYING WIRE IN A B-FIELD WILL EXPERIENCE A FORCE BECAUSE OF THE MOVING CHARGES CONTAINED IN IT.
- CONSIDER THE MAGNETIC FORCE ON A CHARGE:

$$\begin{aligned}
 F_B &= q v B \\
 &= q \frac{d}{t} B \\
 &= d \frac{q}{t} B \\
 &\quad \downarrow \quad \downarrow \\
 &= l I B
 \end{aligned}$$

$$\vec{F}_B = l \vec{I} \times \vec{B}$$

F_B : MAGNETIC FORCE, N
 l : length of wire in B-FIELD, m


VECTOR PRODUCT

I : CURRENT, A

B : MAGNETIC FIELD, T


- DIRECTION IS DETERMINED BY THE RIGHT HAND RULE(#3)

- FBI RULE

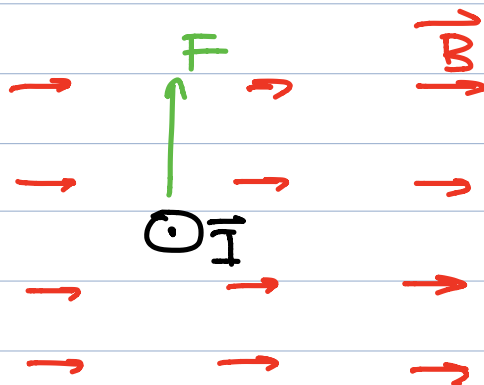

EXAMPLE

A WIRE CARRYING 10.0 A OF CURRENT PASSES THROUGH A 1.5 mT B-FIELD SO THAT 2.0 cm OF THE WIRE IS PERPENDICULAR AS SHOWN. WHAT FORCE IS EXERTED ON THE WIRE?

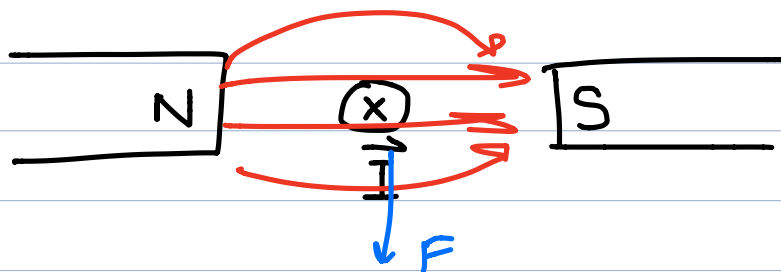


$$F_B = lIB$$

$$= (0.020)(10.0)(1.5 \times 10^{-3})$$

$$= \boxed{3.0 \times 10^{-4} \text{ N DOWN}}$$

EXAMPLE

A WIRE LOOP IS SUSPENDED IN A UNIFORM 0.050 T FIELD AS SHOWN. WHAT CURRENT WILL INCREASE THE TENSION BY 0.30 N ?

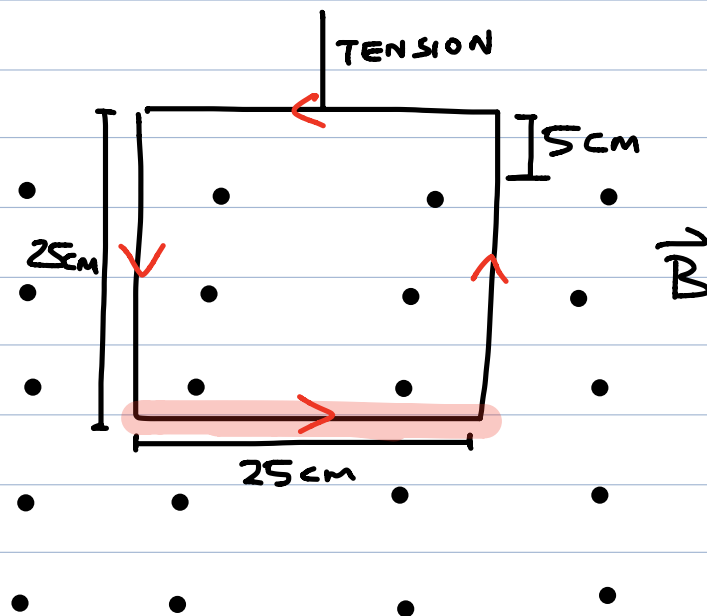


$$F_B = lIB$$

$$I = \frac{F_B}{lB}$$

$$= \frac{0.30}{(0.25)(0.050)} = \boxed{24 \text{ A}}$$

- PARALLEL WIRES WILL EXERT A FORCE ON EACH OTHER

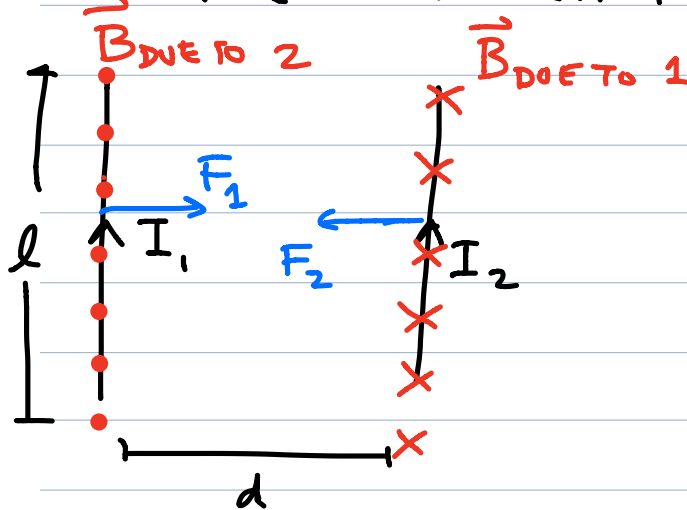


$$\begin{aligned}
 F_1 &= l I_1 B_2 \\
 &= l I_1 \mu_0 I_2 \frac{1}{2\pi d} \\
 &= \mu_0 l \frac{I_1 I_2}{2\pi d}
 \end{aligned}$$

- IF THE CURRENTS ARE IN THE SAME DIRECTION, THE MAGNETIC FORCES ON THE WIRES ARE TOWARDS EACH OTHER; THEREFORE, THE WIRES ATTRACT EACH OTHER
- IF THE CURRENTS ARE IN THE OPPOSITE DIRECTION, THE WIRES WILL REPEL EACH OTHER.

MAGNETIC APPLICATIONS

← ELECTRON CHARGE

$\frac{e}{m}$ RATIO - J.J THOMSON

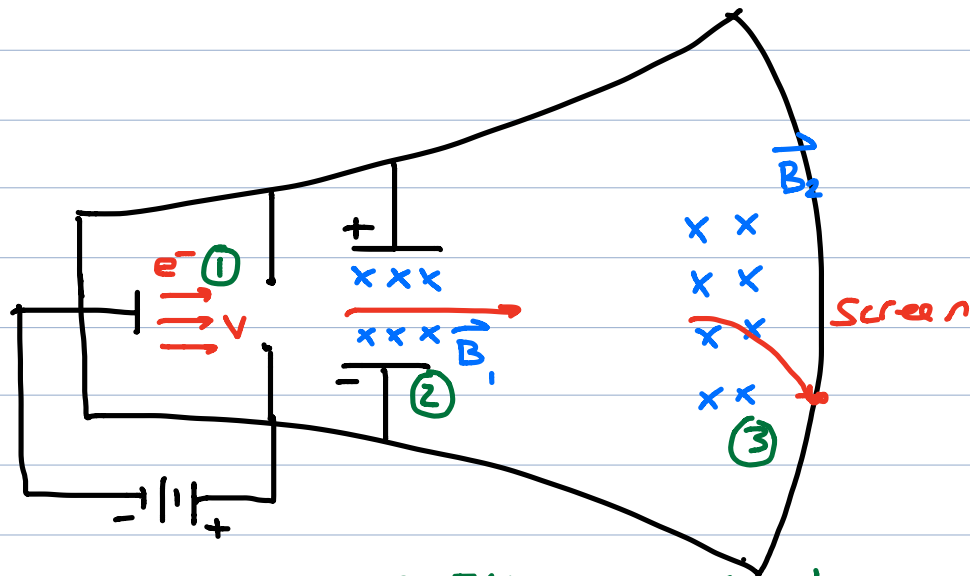

① CATHODE RAY TUBE OR ELECTRON GUN
 · ELECTRONS ARE ACCELERATED BY A POTENTIAL DIFFERENCE V

② VELOCITY SELECTOR
 · ELECTRONS ENTER A MAGNETIC FIELD $*$
 COMBINED WITH AN ELECTRIC FIELD $**$

* MAGNETIC FIELD CAN BE MEASURED BY KNOWING THE LENGTH OF THE COIL, COUNTING THE # OF WINDINGS AND KNOWING THE $B = \mu n I$ COIL

** ELECTRIC FIELD CAN BE MEASURED USING

$$F_E = F_B$$

$$qE = qvB$$

$$v = \frac{E}{B}$$

THE VOLTAGE OF THE
PLATES AND THE
DISTANCE BETWEEN
THE PLATES. $E = \frac{V}{d}$

③ SELECTED ELECTRONS ENTER A SECOND
MAGNETIC FIELD.

$$F_c = F_B$$

$$m \frac{v^2}{r} = qvB_2$$

$$\frac{q}{m} = \frac{v}{B_2 r}$$

charge of e^-
(e)

$$\frac{q}{m} = \frac{E}{B_1 B_2 r}$$


$$v = \frac{E}{B_1}$$

THE $\frac{q}{m}$ RATIO WAS CALCULATED TO BE

$$1.76 \times 10^{11} \frac{C}{kg}$$

MASS SPECTROMETER

- MEASURES THE MASS OF DIFFERENT ISOTOPES

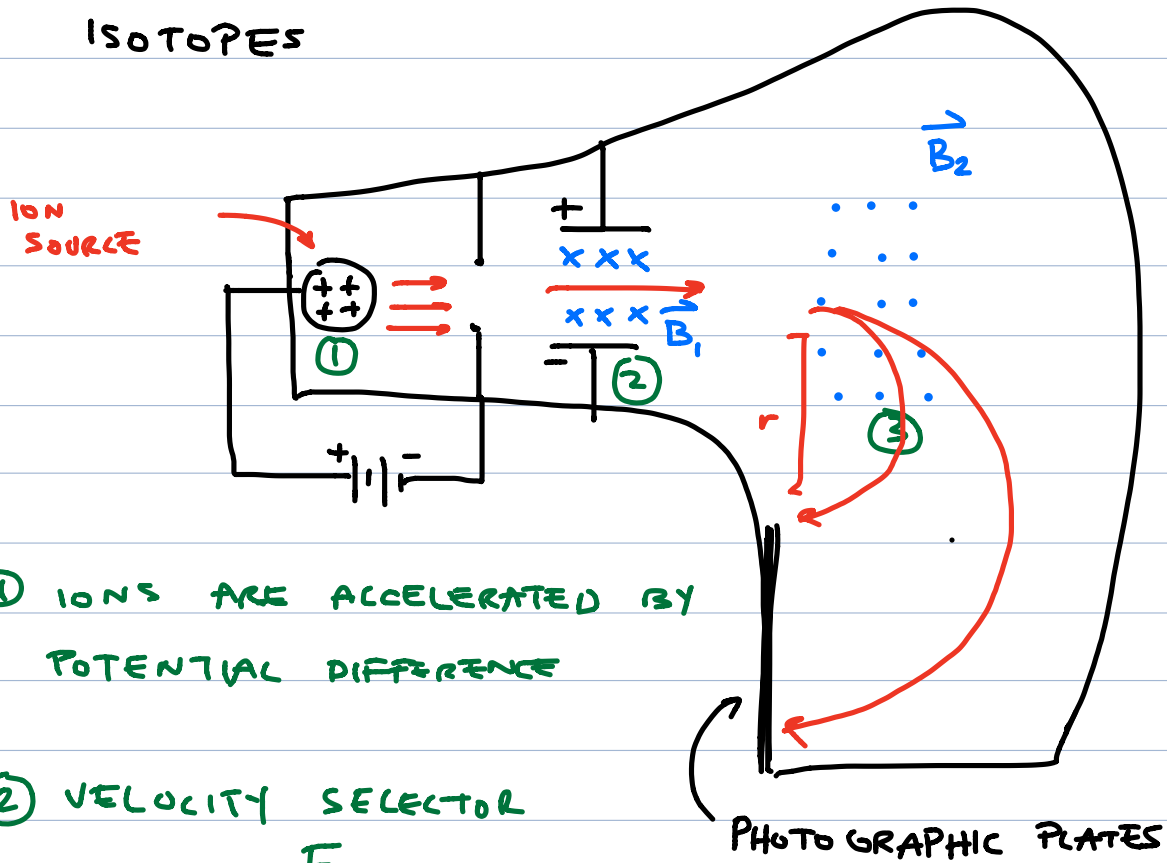

① IONS ARE ACCELERATED BY POTENTIAL DIFFERENCE

② VELOCITY SELECTOR

$$v = \frac{E}{B_1}$$

③ DIFFERENT MASSES ARE SEPARATED ACCORDING TO r .

$$F_c = F_B$$

$$m \frac{v^2}{r} = q v B_2$$

$$m = \frac{q B_2 r}{v}$$

$$v = \frac{E}{B_1}$$

$$m = \left(\frac{q B_1 B_2}{E} \right) r$$